

Las Animas County Driveway Permit (2016-03)

APPLICATION STATUS: (to be completed by County)

Permit # _____ -

Date of Application: _____ Received By: _____

Application Fees Required at date of application: [] Driveway \$25.00 [Check #: _____

Estimated Construction: Start: _____ Complete: _____

APPROVAL:

You must contact _____, County Road & Bridge Foreman (719) _____ before construction begins.

APPLICANT/CONTRACTOR AND OWNER INFORMATION: (to be completed by applicant)

Applicant Name: _____

Land Owner Name: _____

Address: _____

Address: _____

City: _____ State: ____ Zip: _____

City: _____ State ____ Zip _____

Telephone: _____

Telephone: _____

[] DRIVEWAY AGREEMENT

Location (county road -- attach map): _____

Township: ____ Range: ____ Section: ____

It is understood:

All driveways adjoining Las Animas County Roads must obtain a Driveway Permit from the Road and Bridge Department.

These driveways must be constructed adhering to the following criteria:

- All driveways must fall away from the shoulder of the Las Animas County Road at a 2% slope for the first ten (10) feet or over the driveway culvert to prevent drainage into the county road. The driveway may incline or decline from this point. In no case shall the driveways exceed 4% in the right of way. If the access road's (including fore, back and ditch) slopes/grades (outside the 10' or culvert) are greater than 5%, an erosion control plan must accompany this permit. Please see detail in included information below. This 10' must be graveled to prevent contamination of the County Road
 - All driveways shall be a minimum of twenty (20) feet wide and a maximum of forty (40) feet wide in the right of way or at the approach to the road. These dimensions include flares.
 - All driveways must approach the road at 80 to 90 degrees to the center line of the existing County Road with a sight distance to be determined by County but no less than 300 feet in each direction of the road being accessed.
 - The minimum culvert size shall be eighteen (18) inches. If the driveway crosses a major drainage way, the Las Animas County Road Agent for that area may require an increase in the size of the culvert. It is recommended that both sides of the culvert be armored with rip rap, rocks or a culvert end section.
 - A Traffic Control Plan, developed by a certified traffic control supervisor, must be submitted for all work performed within County road rights-of-way, or that will directly affect the travelling public. All warning signs etc. used within the County right of way must be in conformance with all applicable portions of the latest edition of the Manual on Uniform Traffic Control Devices.
 - Applicant shall be responsible for any damage and associated repairs to the County Road and utilities
 - This permit is not valid until it is signed by a duly authorized representative of Las Animas County
- Colorado State Law requires that anyone who engages in any type of excavation must notify underground facility owners.

CERTIFICATION BY APPLICANT:

I hereby state that this application is made with full knowledge of the design standards, procedures, Federal, State and Local regulations and other provisions applicable to this application:

Signature of Applicant: _____ Date: _____

[] Approved [] Denied Paid in full : check # _____

Signature: _____ Date: _____

[] Approved [] Denied Commence with construction

Signature: _____ Date: _____

[] Approved [] Denied During construction inspection

Signature: _____ Date: _____

[] Approved [] Denied Post construction inspection



Signature: _____ Date: _____

Make checks payable to: Las Animas County

Send permit application and payment to:

Las Animas County Road and Bridge Dept (or email to lasanimascounty@gmail.com)
2000 N Linden Ave
Trinidad CO 81082

Driveway Access

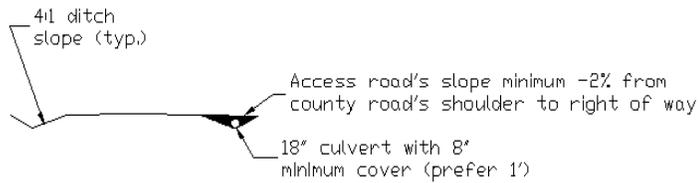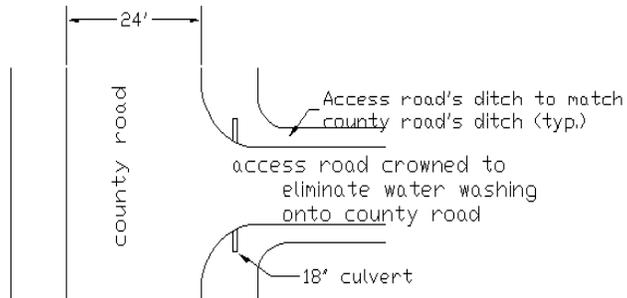

Typical gradations for base materials

Mass Percent Passing Square Mesh Sieves			
Sieve Size	Class 5	Surface Gravel	ABC
2"	100		
1 1/2"	90-100		
1"			
3/4"	50-90	100	100
#4	30-70	50-80	30-65
#8		35-70	25-55
#40		20-40	
#200	15-25	8-14	3-12

The Surface Gravel shall be used to surface any County Road at a depth of 6" and shall have a plasticity index between 4 – 10.

The ABC shall not have a liquid limit of greater than 30

Typical road cross section (when practical)

